


No. 271A Vacuum Tube

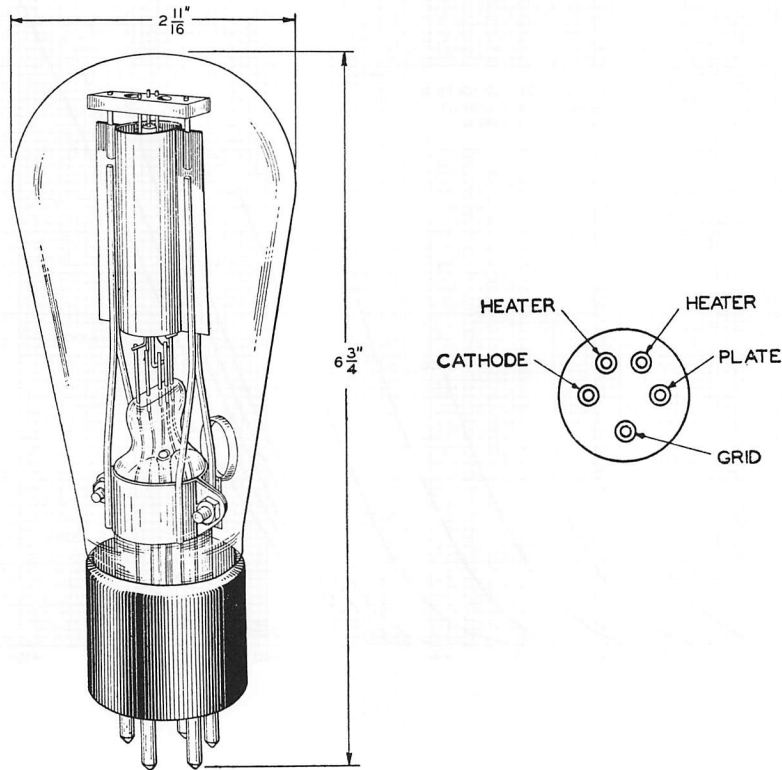

Classification

The No. 271A Vacuum Tube is a general purpose three-element tube having an indirectly heated cathode which permits operation directly on alternating current. The tube is for use as an audio-frequency amplifier in output stages. It may also be used as a radio-frequency amplifier and, under restricted conditions, as an oscillator or modulator.

Base and Socket

The No. 271A Vacuum Tube employs a standard five-prong base suitable for use in a Western Electric No. 134A (cushion) or No. 137A (rigid) socket or similar type socket. The arrangement of electrode connections to the base terminals is shown above.

Rating and Characteristic Data


| | | |
|-----------------------------------|------|-------------------|
| Heater Voltage | | 5 Volts, AC or DC |
| Average Heater Current | | 2 Amperes |
| Plate Voltage..... | 350 | 400 Volts Maximum |
| Grid Voltage..... | -25 | -30 Volts |
| Average Plate Current..... | 36 | 39 Milliamperes |
| Average Plate Resistance..... | 2900 | 2850 Ohms |
| Average Amplification Factor..... | 8.5 | 8.5 |

Approximate Direct Interelectrode Capacities

| | |
|-----------------------|---------|
| Plate to Grid..... | 5.3 MMF |
| Plate to Cathode..... | 3.8 MMF |
| Grid to Cathode..... | 6.5 MMF |

Average Static Characteristics

The accompanying curves give the average static characteristics of the No. 271A Vacuum Tube.

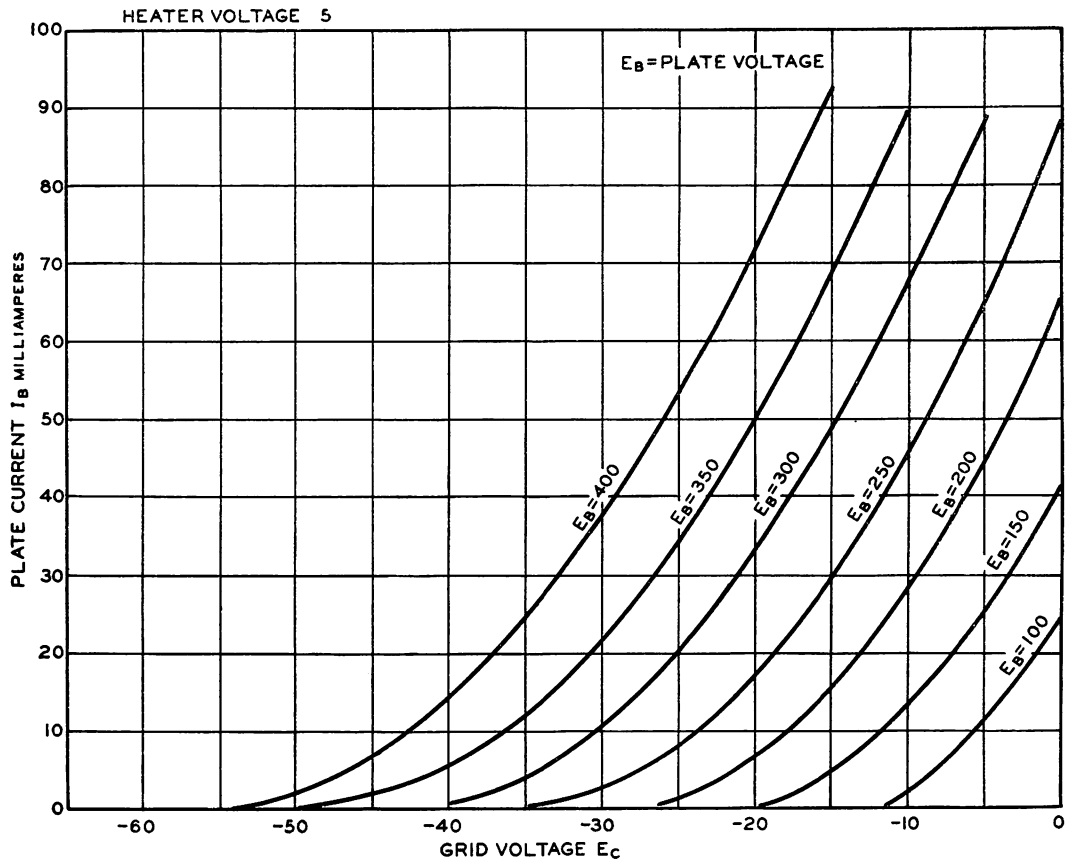


General Features

The indirectly heated cathode of the No. 271A Vacuum Tube makes it suitable for use as a power amplifier in applications requiring a low hum disturbance resulting from the use of alternating current for cathode power supply. Its hum level is approximately 30 db lower than that of filamentary type tubes of corresponding power output.

It has a large cathode area giving ample electron emission. This, together with the rugged construction, insures the maintenance of uniform electrical characteristics over a long life even when the tube is operated at its maximum rating.

Western Electric

271A Vacuum Tube

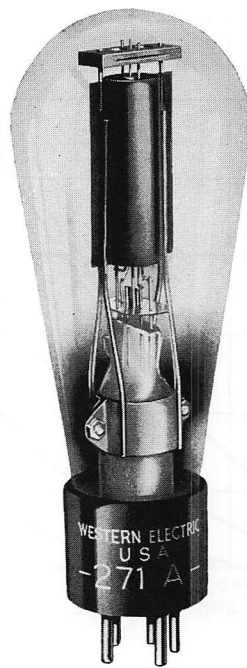

Classification—Moderate-power triode with indirectly heated cathode

Applications

Audio-frequency amplifier or modulator where outputs up to about 3 watts are required.

Radio-frequency power amplifier.

Oscillator.

Dimensions—Dimensions, outline diagrams of the tube and base, and the arrangement of the electrode connections to the base terminals are shown in Figures 1 and 2.

Base—Medium, five-pin type.

Socket—Standard, five-contact type such as the Western Electric 141A socket.

Mounting Positions—The 271A tube may be mounted in any position.

Average Direct Interelectrode Capacitances

| | |
|---------------------------------------|-----------------------|
| Grid to plate | 5.3 $\mu\mu\text{f.}$ |
| Grid to heater and cathode | 6.5 $\mu\mu\text{f.}$ |
| Plate to heater and cathode | 3.8 $\mu\mu\text{f.}$ |

Heater Rating

| | |
|----------------------------------|-------------------------|
| Heater voltage | 5.0 volts, a.c. or d.c. |
| Nominal heater current | 2.0 amperes |

The heater element of this tube is designed to operate on a voltage basis and should be operated at as near the rated voltage as is practicable.

Cathode Connection—When the heater is operated on alternating current, a minimum level of hum in the tube can usually be obtained by connecting the cathode either directly to the heater at terminal 5, shown in Figure 2, or to a center tap on the secondary of the filament transformer. This minimum hum level is approximately 30 decibels lower than for a well designed filamentary tube of similar characteristics. If voltage must be applied between the heater and cathode, it should be kept as low as possible and should never exceed 90 volts.

Characteristics—Plate current characteristics of a typical 271A tube are shown in Figure 3 as functions of grid voltage for several values of plate voltage. Similar characteristics as functions of plate voltage for several values of grid voltage are shown in Figure 4. Amplification factor, plate resistance, and transconductance characteristics corresponding to the plate current characteristics of Figure 3 are given in Figures 5, 6, and 7, respectively.

Limiting Conditions for Safe Operation

| | |
|---|-----------------|
| Maximum plate voltage | 450 volts |
| Maximum plate current | 60 milliamperes |
| Maximum instantaneous grid potential on positive swing of input voltage | +20 volts |

Operating Conditions and Output—Permissible operating conditions are included within the area, ABCD, in Figure 3. Amplification factor, plate resistance, transconductance, and performance data are listed in the table on page 3 for typical operating conditions represented by selected points within this area. Less severe operating conditions should be selected in preference to maximum operating conditions wherever possible. The life of the tube at maximum conditions may be shorter than at less severe conditions.

The performance data include the fundamental power output, P_m , in watts, and the second and third harmonic levels, F_{2m} and F_{3m} , in decibels below the fundamental for the indicated values of load resistance and input voltage. The peak value of the sinusoidal input voltage, E_{gm} , is numerically equal to the grid bias for each operating condition. For a smaller input voltage, E_g , the output and harmonic levels are given approximately by the following relations:

$$P = P_m \left(\frac{E_g}{E_{gm}} \right)^2$$

$$F_2 = F_{2m} + 20 \log_{10} \frac{E_{gm}}{E_g}$$

$$F_3 = F_{3m} + 40 \log_{10} \frac{E_{gm}}{E_g}$$

TABLE

| Plate Voltage | Grid Bias | Plate Current | Amplification Factor | Plate Resistance | Transconductance | Input Voltage | Load Resistance | Power Output | Second Harmonic | Third Harmonic |
|---------------|-----------|---------------|----------------------|------------------|------------------|---------------|-----------------|--------------|-----------------|----------------|
| Volts | Volts | Milli-amperes | | Ohms | Micro-mhos | Peak Volts | Ohms | Watts | db | db |
| 300 | -25 | 19.5 | 8.2 | 3650 | 2250 | 25 | 7300 | 1.3 | 23 | 50 |
| | | | | | | | 14600 | 0.9 | 27 | 55 |
| 350 | -30 | 21.5 | 8.1 | 3550 | 2300 | 30 | 7100 | 1.9 | 22 | 48 |
| | | | | | | | 14200 | 1.4 | 27 | 55 |
| 350 | -25 | 34.5 | 8.4 | 2850 | 2930 | 25 | 2850 | 1.9 | 20 | 47 |
| | | | | | | | 5700 | 1.7 | 25 | 70 |
| | | | | | | | 11400 | 1.3 | 29 | 50 |
| 350 | -20 | 51.0 | 8.6 | 2460 | 3500 | 20 | 2460 | 1.6 | 24 | 70 |
| | | | | | | | 4920 | 1.4 | 28 | 55 |
| | | | | | | | 9840 | 1.0 | 31 | 50 |
| 400 | -35 | 24.5 | 8.1 | 3450 | 2350 | 35 | 6000 | 2.8 | 20 | 43 |
| | | | | | | | 8000 | 2.5 | 22 | 50 |
| | | | | | | | 10000 | 2.3 | 24 | 60 |
| | | | | | | | 15000 | 1.9 | 27 | 55 |
| 400 | -30 | 37.5 | 8.3 | 2830 | 2920 | 30 | 4000 | 2.8 | 22 | 50 |
| | | | | | | | 6000 | 2.4 | 25 | 70 |
| | | | | | | | 8000 | 2.2 | 27 | 55 |
| | | | | | | | 10000 | 1.9 | 28 | 55 |
| | | | | | | | 15000 | 1.5 | 30 | 50 |
| 400 | -25 | 54.0 | 8.5 | 2450 | 3480 | 25 | 3000 | 2.3 | 24 | 70 |
| | | | | | | | 4000 | 2.2 | 26 | 55 |
| | | | | | | | 6000 | 1.9 | 28 | 50 |
| | | | | | | | 8000 | 1.7 | 30 | 50 |
| | | | | | | | 12000 | 1.3 | 32 | 50 |
| *450 | -30 | 57.5 | 8.5 | 2450 | 3480 | 30 | 2450 | 3.4 | 22 | 50 |
| | | | | | | | 4900 | 3.1 | 30 | 60 |

*Maximum operating conditions.

Curves showing the variation of power output and harmonic levels with load resistance for several values of operating plate current are given in Figures 8, 9, and 10 for a plate voltage of 400 volts. The sharp minima which appear in the third harmonic curves are characteristic of the 271A tube, but their positions may be different for different tubes. For this reason, the third harmonic level in any individual tube may be widely different from the value given in the table where the operating condition under consideration is near one of these minima. Near these points, also, the expression given above for third harmonic level is not reliable.

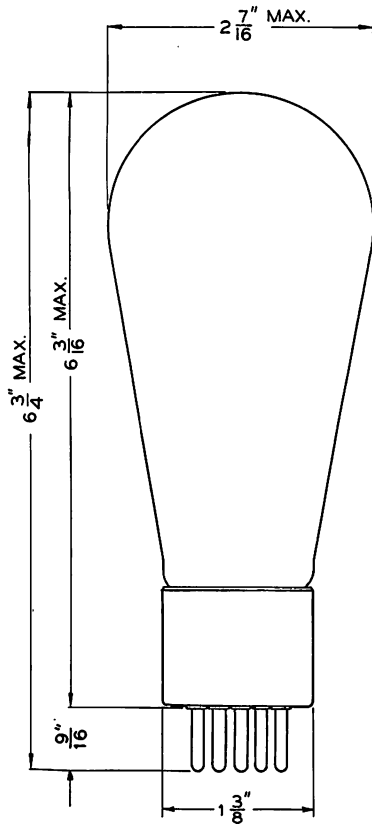


FIG. 1

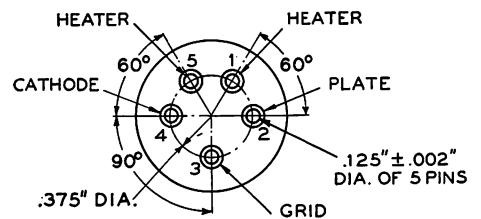


FIG. 2

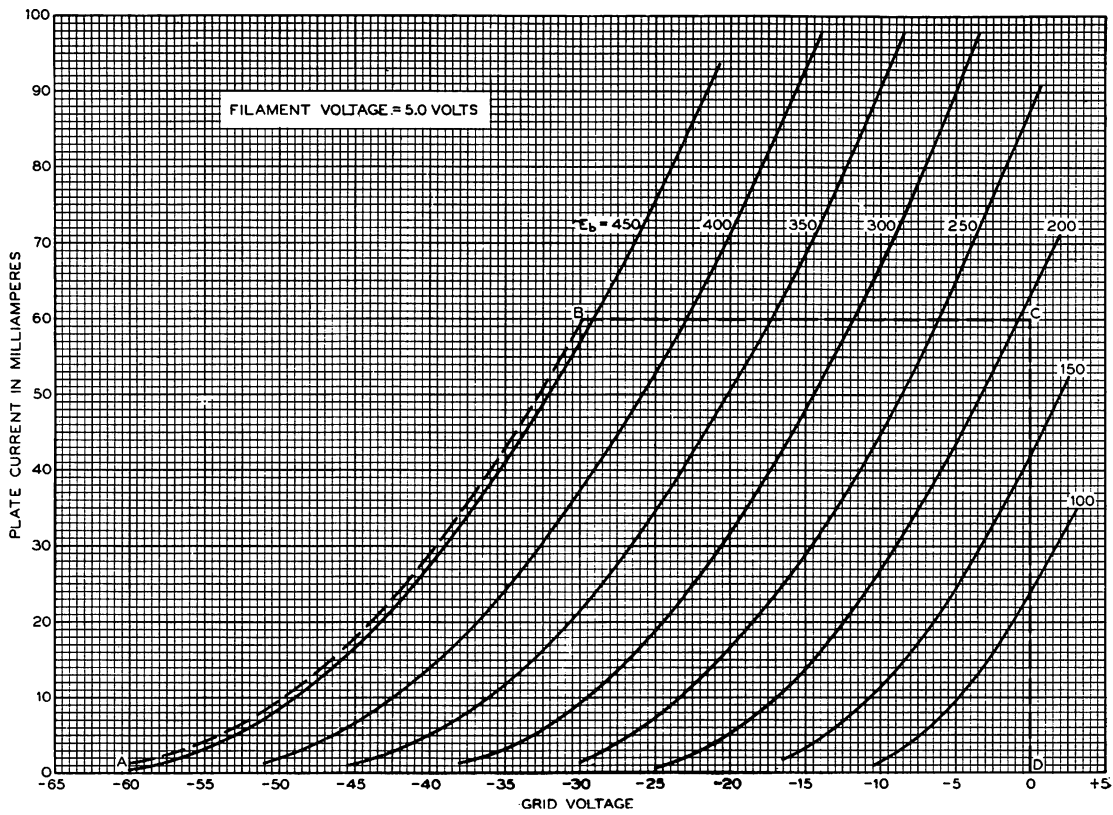


FIG. 3

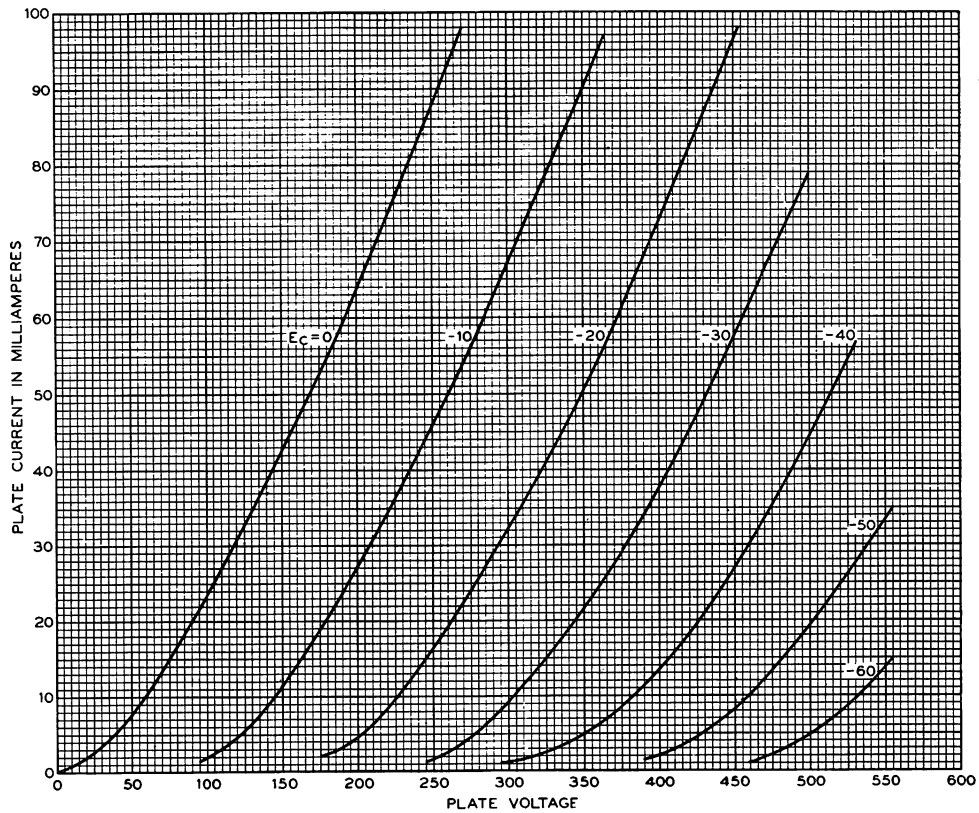
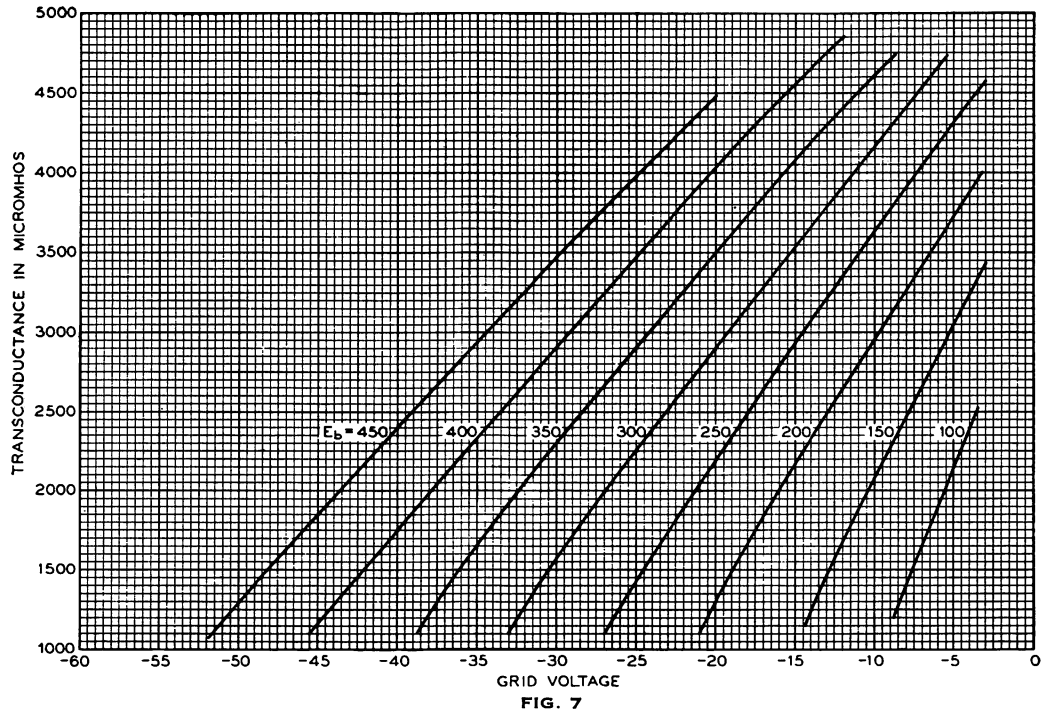
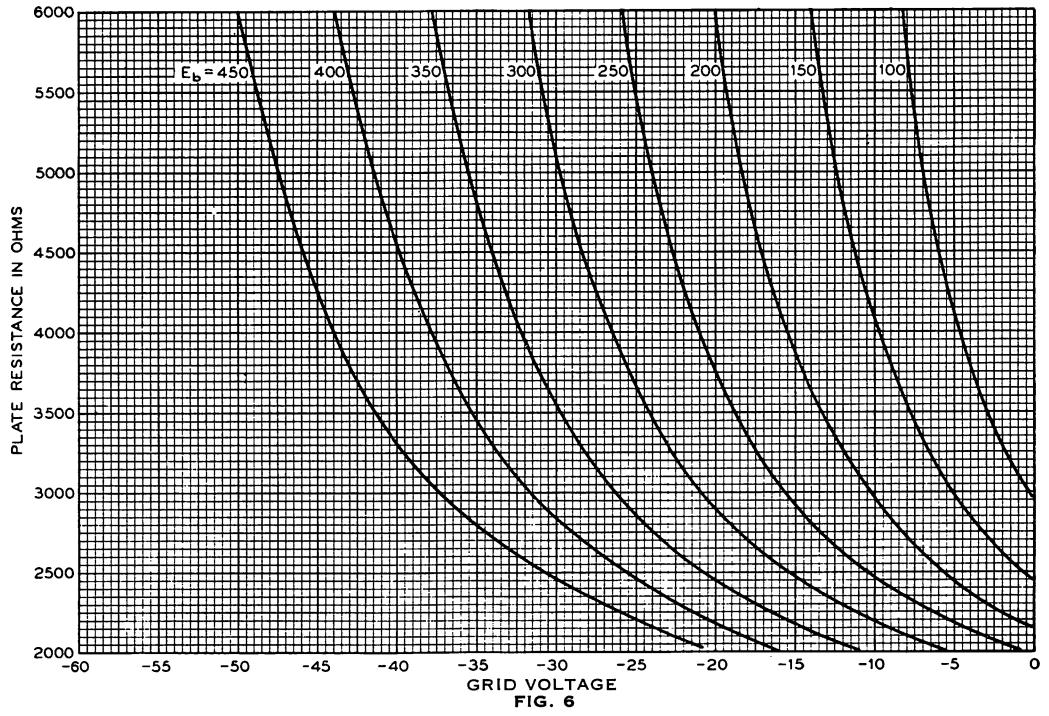
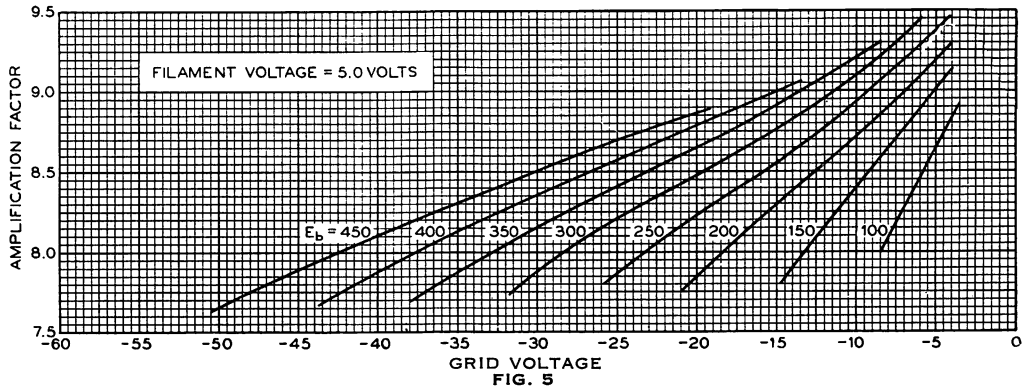


FIG. 4



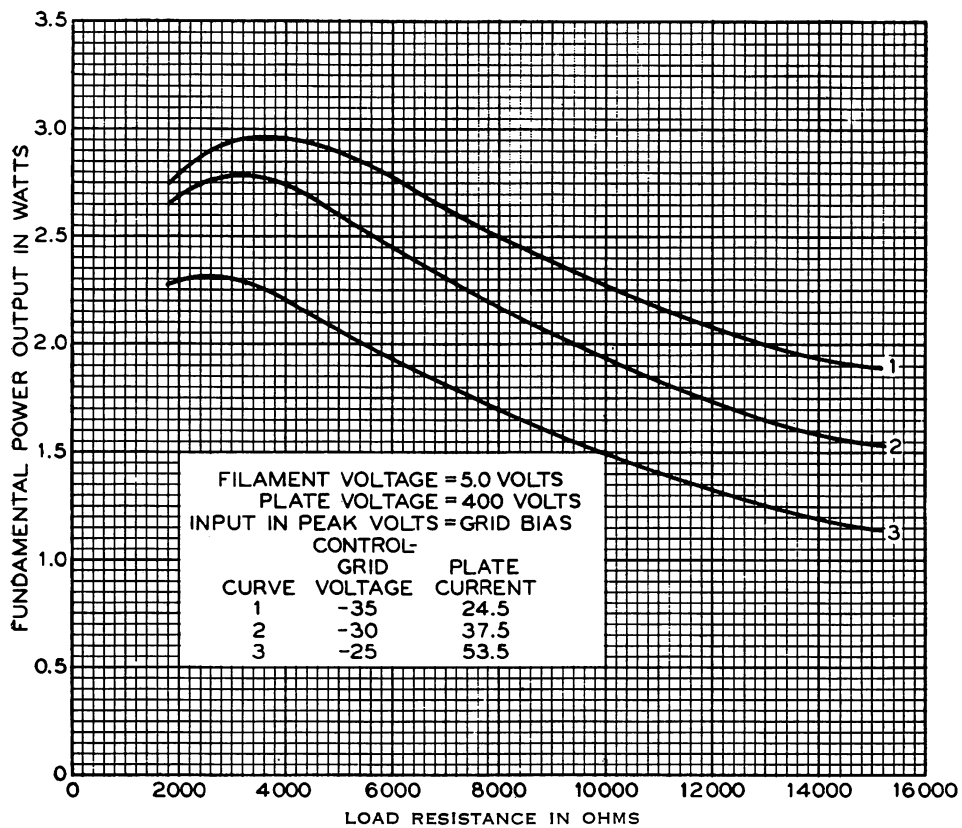


FIG. 8

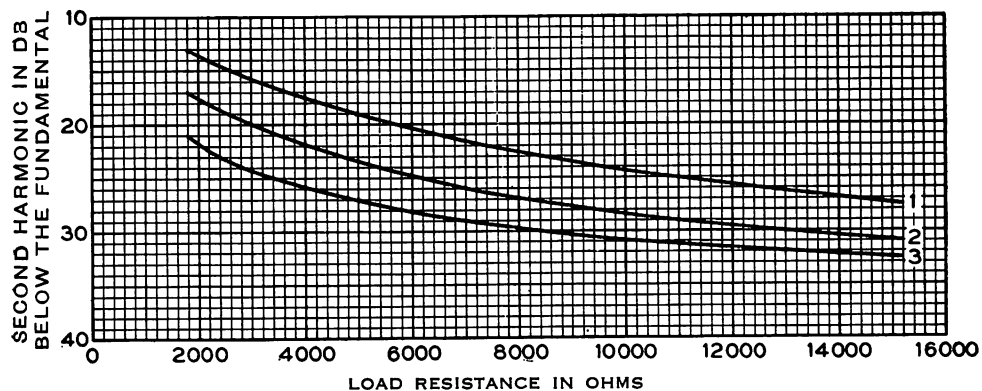


FIG. 9

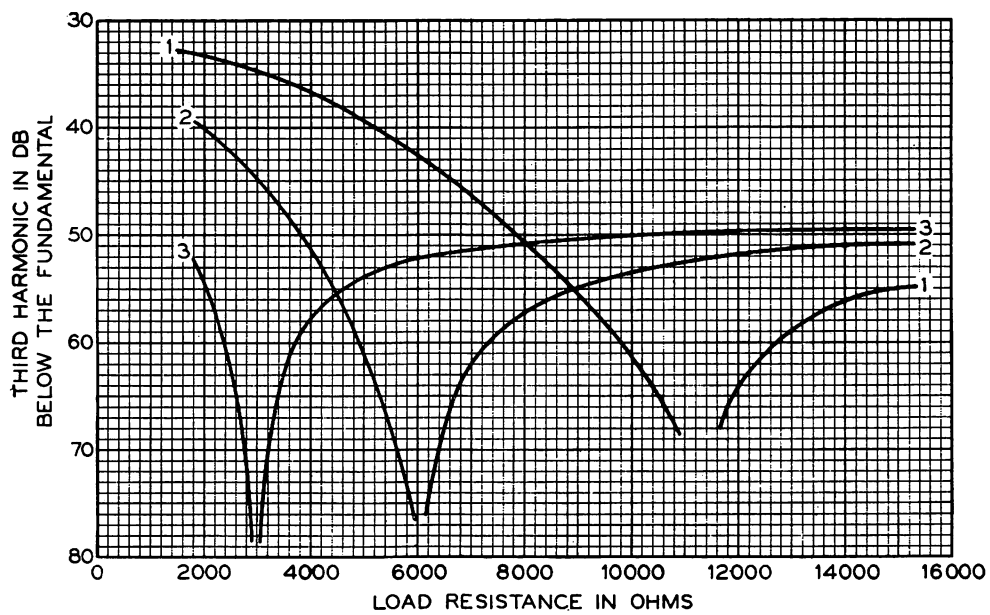


FIG. 10