


102G Vacuum Tube

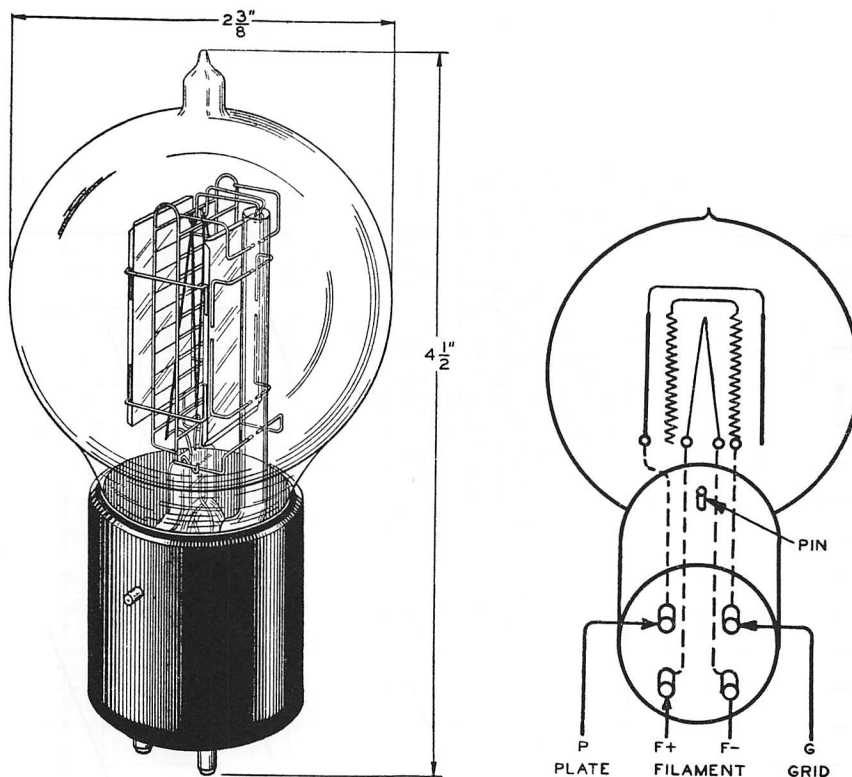

Classification

The No. 102G is a three element filamentary type vacuum tube primarily intended for use as a voltage amplifier. It may also be used as a modulator, detector, or in volume indicator circuits.

Base and Socket

The No. 102G Vacuum Tube employs a four prong bayonet pin type base suitable for use in the Western Electric 100L (front panel mounting), 100R (rear panel mounting), or similar type socket.

Rating and Characteristic Data

Filament Current.....				1.0 Ampere
Filament Voltage.....				2.1 Volts
Plate Voltage.....	130	160	160	190 Max.
Grid Voltage.....	-1.5	-2	-2	-3
Average Plate Current—Millamperes..	0.6	0.9	0.9	0.9
Average Amplification Factor.....	30	30	30	29.5
Average Plate Resistance—Ohms.....	60,000	50,000	50,000	50,000
*Average Peak Voltage Output.....	30	45	50	65
Second Harmonic—% of Fundamental	3	2	1.5	4
Third Harmonic—% of Fundamental	0.2	0.2	0.1	0.4
Load Resistance—Ohms.....	175,000	150,000	250,000	150,000


*Input in peak volts is equal to grid voltage.

Approximate Direct Interelectrode Capacities (measured without sockets)

Plate to Grid.....	5.0 MMF
Plate to Filament.....	1.7 MMF
Grid to Filament.....	2.9 MMF

Average Static Characteristics

The accompanying curve gives the average static characteristics for the 102G tube. These curves have been obtained with the filament operating on direct current and the grid and plate returns connected to the negative end of the filament.

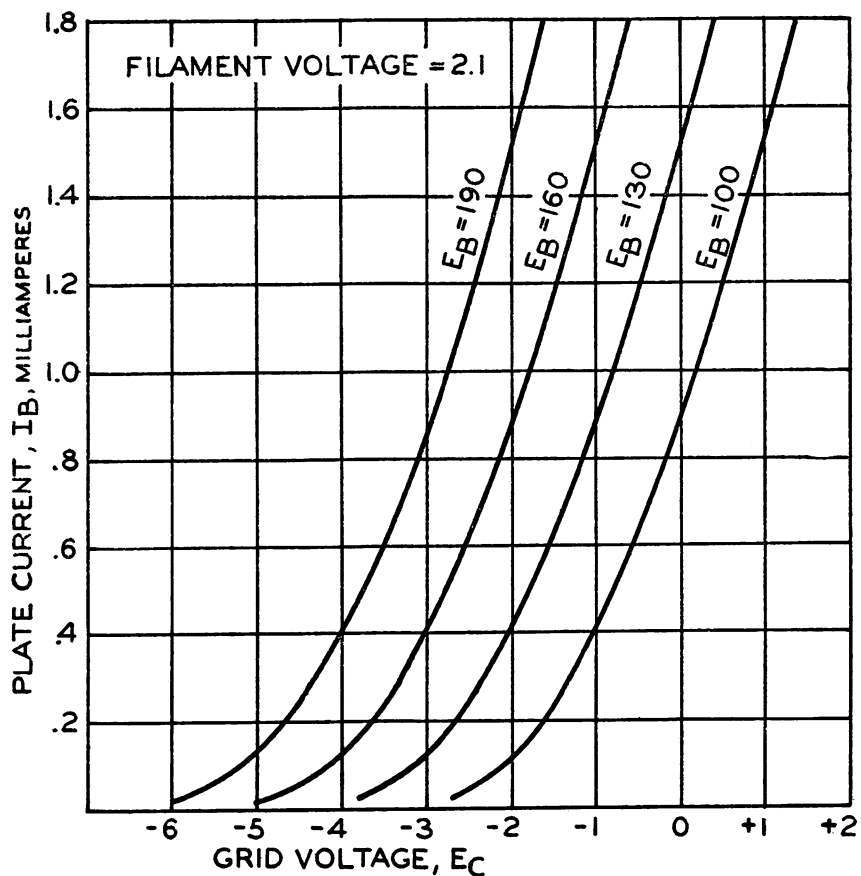


General Features

The 102G tube has an extremely low noise level and is especially recommended for early stages of high gain low frequency amplifiers where unusual freedom from noises due to resistance films and shot effects is required. It differs from the 102D only in the unusually low level of the extraneous noises. In addition, the design is such as to maintain extremely high insulation between elements throughout the life of the tube. The prongs of the base are equipped with special contact metal tips to prevent noise disturbance due to poor electrical contact with the springs of the socket.

This tube has the same long life feature as is obtained in the 102D tube.

Western Electric

102G Vacuum Tube

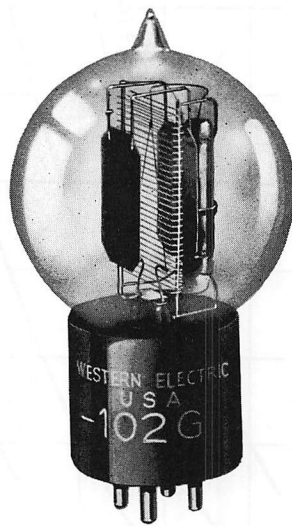

Classification—Filamentary, voltage amplifier triode

The 102G tube is similar to the 102D tube except that special precautions have been taken in the 102G to minimize insulation leaks and sputter noise in the tube.

Applications,

- Audio-frequency voltage amplifier.
- Detector or modulator.

Dimensions—Dimensions, outline diagrams of the tube and base, and the arrangement of the electrode connections to the base terminals are shown in Figures 1 and 2.

Base—Medium, four-pin, bayonet type having special contact metal at the ends of the contact pins

Socket—Four-contact, bayonet-slot type, preferably provided with contact-metal contacts, such as the Western Electric 100L for front of panel mounting or 100R for rear of panel mounting.

Mounting Positions—Either vertical or horizontal. If mounted in a horizontal position, the plane of the filament, which is indicated in Figure 2, should be vertical.

Average Direct Interelectrode Capacitances

	<u>A</u>	<u>B</u>	<u>C</u>
Grid to plate, $\mu\mu\text{f.}$	5.0	4.7	4.7
Grid to filament, $\mu\mu\text{f.}$	2.9	4.3	4.6
Plate to filament, $\mu\mu\text{f.}$	1.7	2.7	3.0

Column A—Based tube without socket.

Column B—Tube alone when measured in 100L socket mounted on metal plate; socket and mounting plate connected to filament.

Column C—Tube alone when measured in 100R socket mounted in metal plate; socket and mounting plate connected to filament.

Filament Rating

Filament current.....	1.0 ampere, d.c.
Nominal filament voltage.....	2.1 volts

The filament of this tube is designed to operate on a current basis and should be operated at as near the rated current as is practicable.

Characteristics—Plate current characteristics of a typical 102G tube are shown in Figure 3 as functions of grid voltage for several values of plate voltage. The grid and plate voltages are measured from the negative end of the filament. Corresponding amplification factor, plate resistance, and transconductance characteristics are given in Figures 4, 5 and 6, respectively. Plate current characteristics as functions of plate voltage are shown in Figure 7 for several values of grid voltage.

Operating Conditions and Output—Permissible operating plate and grid voltages are included within the area, ABCD, in Figure 3. Amplification factor, plate resistance, transconductance, and performance data are given in the table on page 3 for a number of typical operating conditions represented by selected points within this area. The less severe operating conditions should be selected in preference to maximum operating conditions wherever possible. The life of the tube at maximum conditions may be shorter than at less severe conditions.

The performance data include the fundamental output voltage in peak volts and the second and third harmonic levels in decibels below the fundamental for values of load resistance, R , equal to one, three, and five times the plate resistance, r_p . The peak value of the sinusoidal input voltage, E_{gm} , which gives the indicated output voltage, E_{pm} , and harmonic levels F_{2m} and F_{3m} , in each case, is numerically equal to the grid bias. For a smaller input voltage, E_g , the approximate levels may be computed from the following relations.

$$E_p = E_{pm} \frac{E_g}{E_{gm}}$$

$$F_2 = F_{2m} + 20 \log_{10} \frac{E_{gm}}{E_g}$$

$$F_3 = F_{3m} + 40 \log_{10} \frac{E_{gm}}{E_g}$$

TABLE

Plate Voltage Volts	Grid Bias Volts	Plate Current Milli-amperes	Amplification Factor	Plate Resistance Ohms r_p	Trans-conductance Micro-mhos	Input Voltage Peak Volts	Load Resistance R	Output Voltage Peak Volts	Second Harmonic db	Third Harmonic db
130	-2.0	0.36	29.4	80000	370	2.0	$R = r_p$	27	20	41
							$R = 3r_p$	38	24	44
							$R = 5r_p$	41	25	45
130	-1.5	0.58	29.8	63000	470	1.5	$R = r_p$	20	26	47
							$R = 3r_p$	30	31	50
							$R = 5r_p$	34	33	55
130	-1.0	0.85	30.1	53000	570	1.0	$R = r_p$	15	33	55
							$R = 3r_p$	20	39	60
							$R = 5r_p$	23	40	60
160	-3.0	0.34	29.2	81000	360	3.0	$R = r_p$	40	18	36
							$R = 3r_p$	57	21	40
							$R = 5r_p$	62	22	40
160	-2.0	0.80	29.9	54000	550	2.0	$R = r_p$	28	27	46
							$R = 3r_p$	42	33	55
							$R = 5r_p$	45	34	55
160	-1.0	1.45	30.3	42000	720	1.0	$R = r_p$	15	38	60
							$R = 3r_p$	21	43	65
							$R = 5r_p$	24	48	65
*190	-3.0	0.83	29.8	54000	550	3.0	$R = r_p$	42	23	40
							$R = 3r_p$	63	28	48
							$R = 5r_p$	68	30	50
*190	-2.0	1.46	30.2	43000	700	2.0	$R = r_p$	30	31	50
							$R = 3r_p$	43	38	60
							$R = 5r_p$	48	41	60




*Maximum operating conditions.

Microphonic Noise—With a plate voltage of 130 volts, a grid bias of -1.5 volts, and a load resistance of 100,000 ohms, the mean microphonic noise output level of the 102G tube, measured in a laboratory reference test set, is 30 decibels below 1 volt. The range of levels of individual tubes extends from 18 to 38 decibels below 1 volt. Since microphonic noise depends on the type and intensity of the mechanical disturbance which produces it, the values given here are useful chiefly for comparison with the levels of other tubes which have been tested in the same way.

Sputter Noise—A particularly disagreeable type of noise, characterized by an unmusical crackling or sputtering sound, occurs in many vacuum tubes, sometimes as a result of slight mechanical agitation. Such noise is usually due either to discontinuously variable insulation leaks between electrodes or to intermittent contacts involving conducting members such as filament supports which, at times of no contact, are insulated from other parts of the tube. Special precautions have been taken in the design of the 102G tube to eliminate this type of noise.

Fluctuation Noise—An irreducible minimum of noise in a vacuum tube is produced by uncontrollable, minute fluctuations in the rate of flow of electrons to the anode. The level of this noise in the 102G tube is unusually low. With a plate voltage of 130 volts, a grid bias of -1.5 volts, and a load resistance of 100,000 ohms, the mean equivalent fluctuation noise input of the 102G tube for the audio-frequency range from 40 to 10,600 cycles is 122.4 decibels below 1 volt. Individual 102G tubes may differ from this value by as much as 1 decibel. By reducing the grid bias

to -0.5 volt, the mean fluctuation noise level may be reduced by about 0.8 decibel. The equivalent noise input voltage is equal to the measured output voltage divided by the voltage amplification of the tube in the measuring circuit.

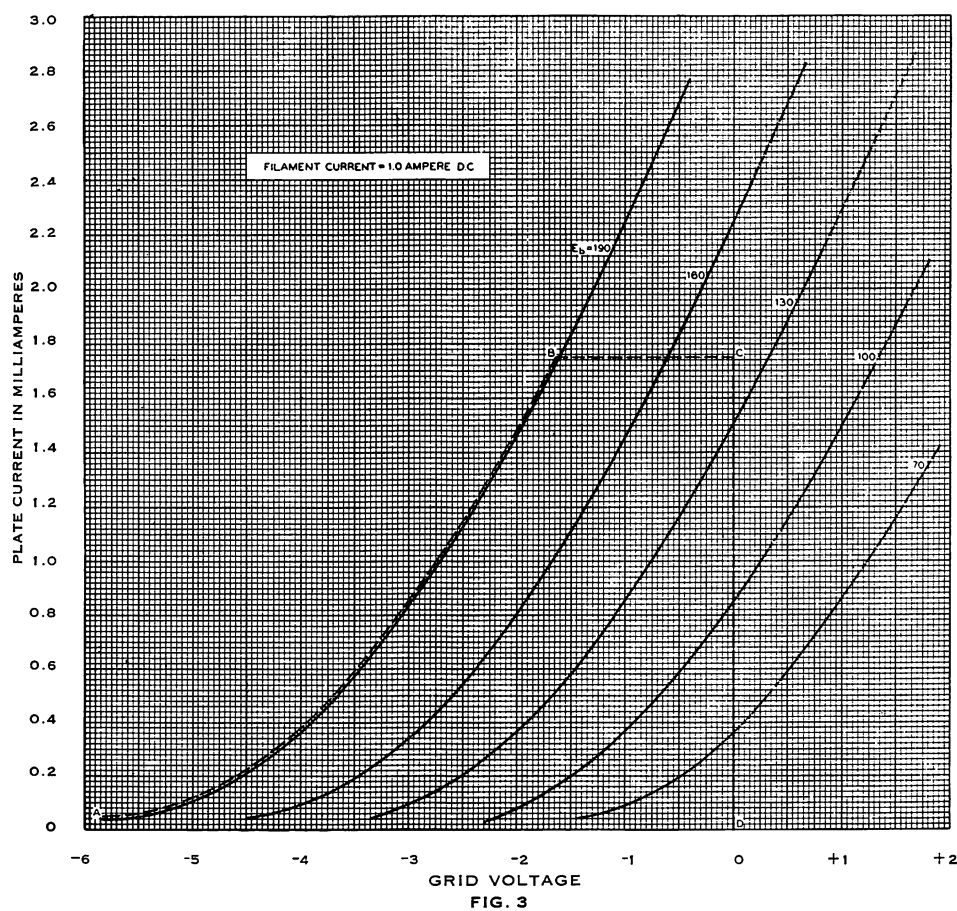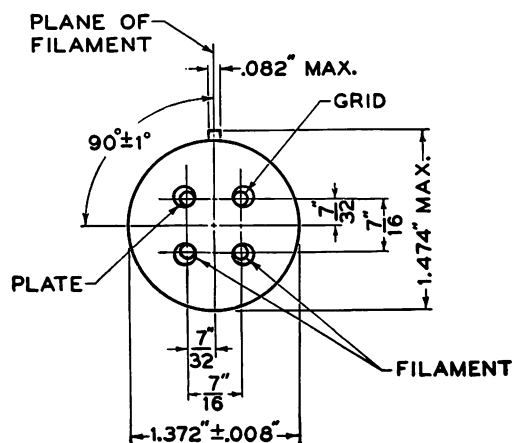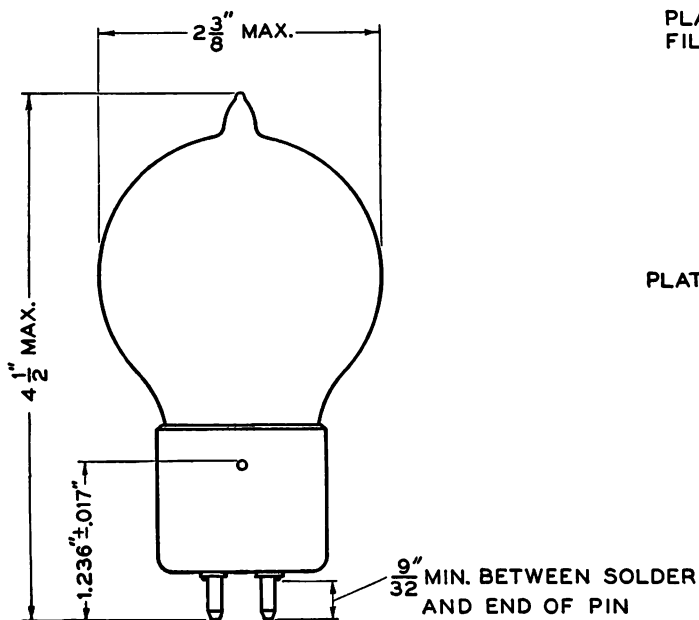

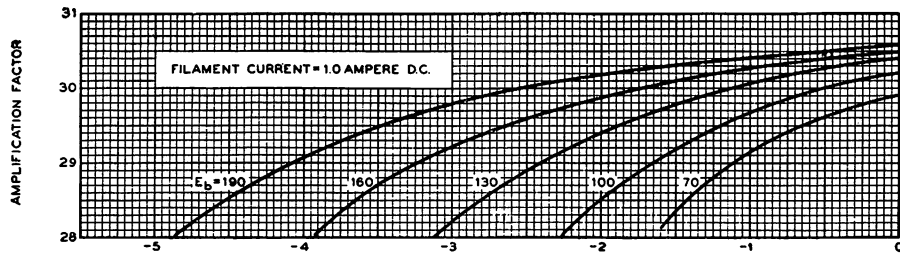


FIG. 4

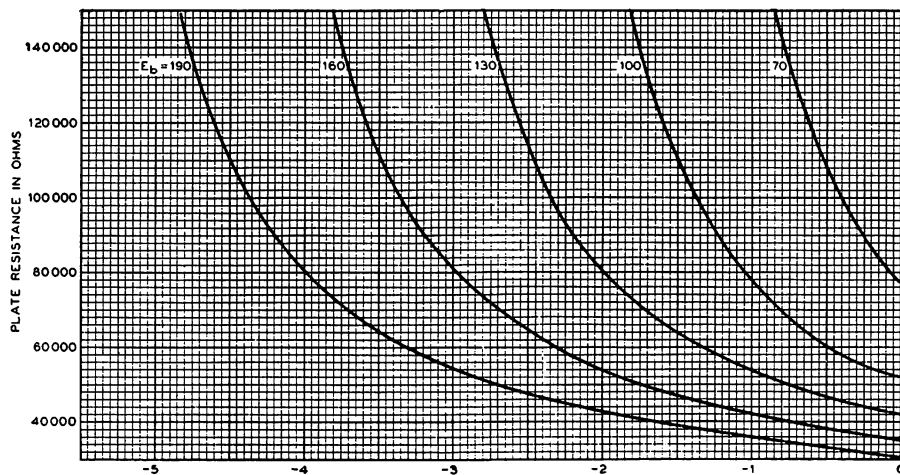


FIG. 5

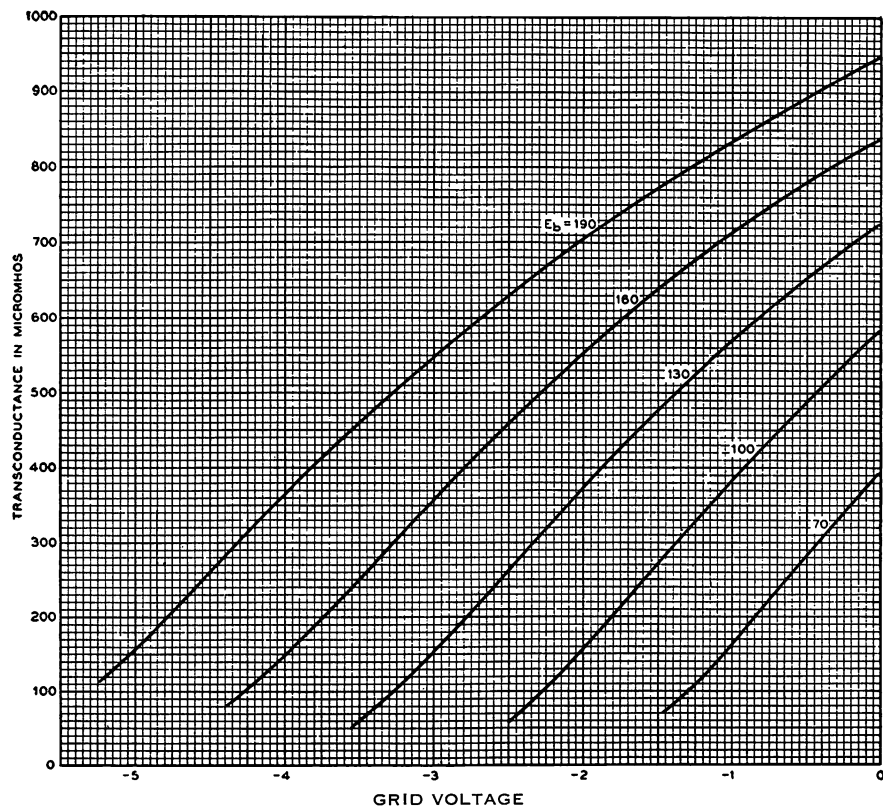


FIG. 6

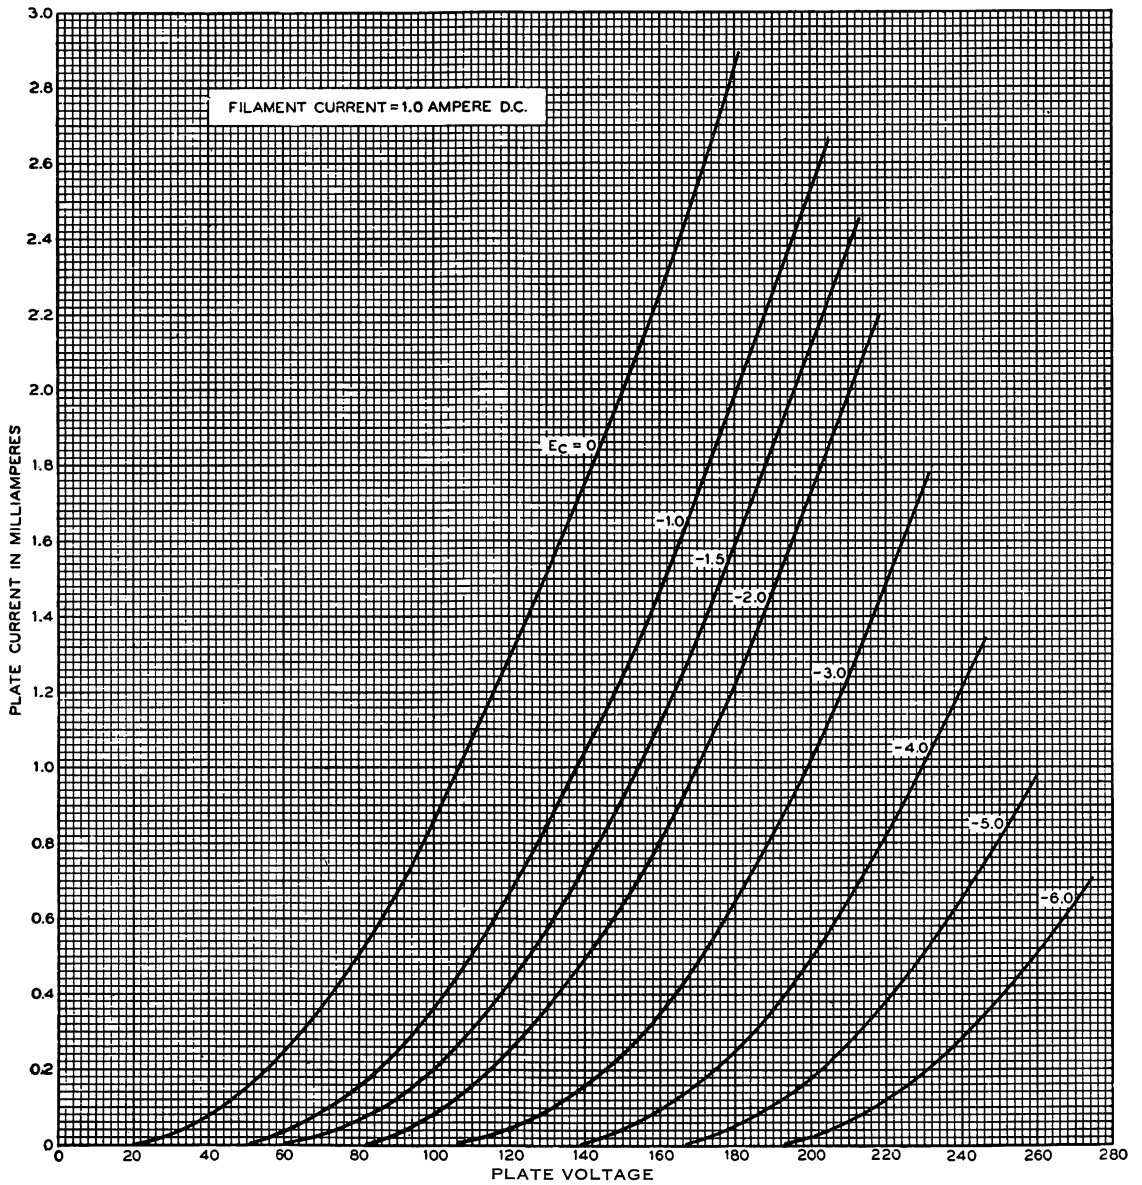


FIG. 7